# SPECIFICATIONS

## SPECIFICATIONS

**Voltage:** Universal - 115/208/230VAC 50/60Hz
**Wattage:** 1450 watts
**Amps:** 12.6 @ 115VAC, 6.3A @ 230VAC
**Motor:** 1800 RPM brushless external rotor
**Volume of Air:** 150 CFM
**Discharged air temperature:** 136ºF / 58ºC at ambient temperature 68ºF / 20ºC
**Sensor:** Solid state infra-red, environmentally sealed
**Circuit breaker:** Bi-metallic temperature limiting circuit breaker, auto-resetting
**Net Weight:** 20 lbs. (9kg)
**Dimensions:** 13-3/4" H X 10-3/8" W X 4" D / 349mm H X 263mm W X 100mm D (Conforms to ADA)
**Warranty:** 10 + 2 years entire dryer - See website for details
**Cover material:** Cast zinc and steel
**Available cover finishes:** Powder coated polyester, chrome, stainless steel, or porcelain enamel
**Mode of locking cover:** Tamper-proof screws

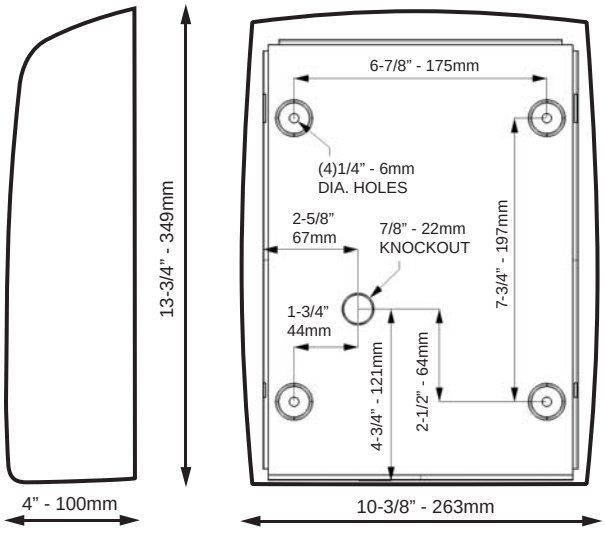


**Distance from bottom edge of dryer to floor:**

| | | |
|---|---|---|
| Men | 47 in | 119 cm |
| Women | 44 in | 112 cm |
| Children 8-10 years | 35 in | 89 cm |
| Children 11-13 years | 38 in | 97cm |
| Children 14-16 years | 44 in | 112 cm |
| Disabled | 36 in | 91 cm |

## FEATURES

**Universal voltage** – Auto-sensing circuit instantly adjusts to 115, 208 or 230 volts
**High performance** – 150 CFM output for quick drying
**Ultra-quiet** – 55 dB, the quietest dryer on the market
**Durable** – Top-quality materials and few wear parts
**Low Total Cost of Ownership** – 10-year warranty and modular 'power pack' mechanism that can be replaced in minutes without special tools
**Beautiful** – Elegant, low profile design available in a variety of finishes to integrate with every décor

C US

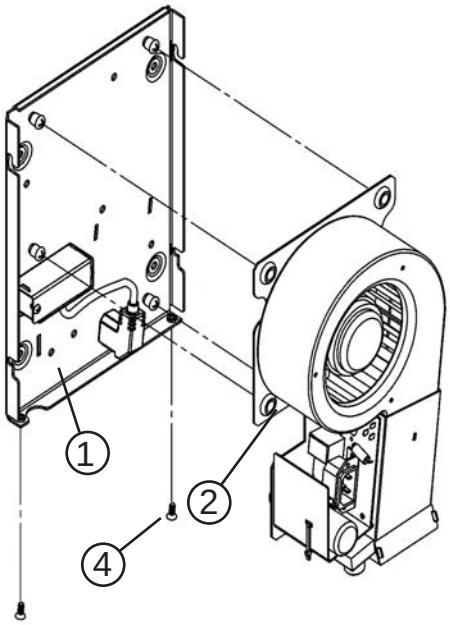


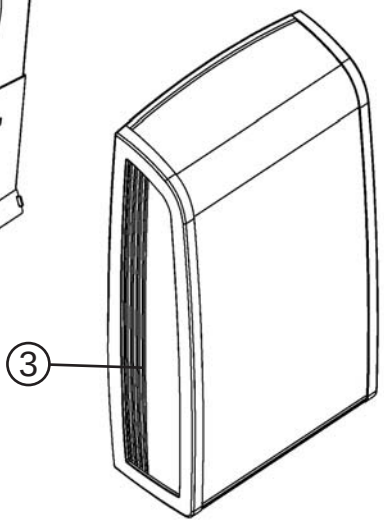


**Replacement Parts**

| | |
|---|---|
| 1 | Wallplate Assembly |
| 2 | Mechanism |
| 3 | Cover |
| 4 | Tamper-proof screw |
| | Tamper-proof key |

Comac Corporation Inc.
www.comaccorporation.com
9620B Ignace, Brossard, Qc, Canada J4Y 2R4
Tel: 450-659-9899 • 800-409-4583 • Fax: 450-659-3412

Printed in Canada